



TECHNICAL DATA / FEATURES

dimensions: 105x105x50
 luminous flux of the LED module: 2400 lm, 1600 lm, 800 lm
 luminous flux of the lamp: 2000 lm, 1300 lm, 650 lm
 maximum power: 27W, 22W, 11W
 nominal voltage: 12V-24V DC
 permissible power supply voltage: 10.5V-30V DC
 source of light: 18 x LED, 12 x LED, 6 x LED
 colour temperature: 4000-6000K
 light distribution angle: 28° x 28°, 50° x 30°
 IP rating: IP67, IP69K
 work temperature: -40°C - +80°C
 housing's material: aluminium
 lens' material: plastic
 built-in connectors: Deutsch DT, AMP SuperSeal 1.5
 other: protection:
 • against overheating
 • against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to its influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).

It is possible to install needed connectors for a version with cable (on request).



Useful parts while installing:

deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1.5 plug 2-pin - cat. No. A.07137

Equivalents for Hella:

CRK2B.54200 - 1GA 011 720-041

DIMENSIONS

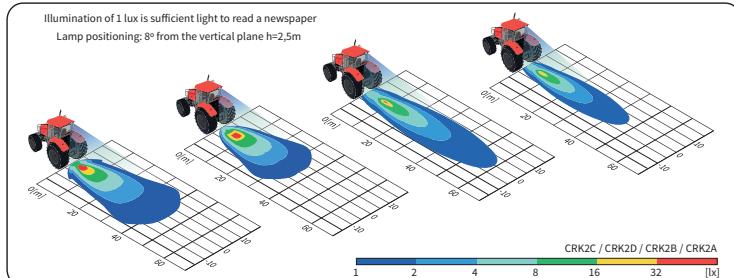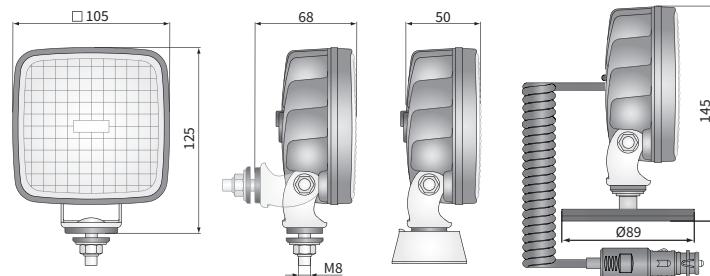

Cat. number	Luminous flux		Beam angle		Accessories	Bracket	M8 omega neodymium magn.	Connectors
	2400 lm	1600 lm	800 lm	28° x 28°	50° x 30°			
CRK2E.57200	✓			✓		✓	✓	Deutsch DT
CRK2E.57240	✓			✓		✓	✓	AMP SuperSeal 1.5
CRK2F.57300	✓			✓		✓	✓	
CRK2F.57340	✓			✓		✓	✓	
CRK2F.57350	✓			✓		✓	✓	
CRK2B.54200		✓		✓		✓	✓	
CRK2B.54230		✓		✓		✓	✓	
CRK2B.54206		✓		✓		✓	✓	
CRK2B.54240		✓		✓		✓	✓	
CRK2B.54250		✓		✓		✓	✓	
CRK2B.54260		✓		✓		✓	✓	
CRK2B.54270		✓		✓		✓	✓	
CRK2B.54280		✓		✓		✓	✓	
CRK2B.54290		✓		✓		✓	✓	
CRK2C.54900		✓		✓		✓	✓	
CRK2C.54920		✓		✓		✓	✓	
CRK2C.54940		✓		✓		✓	✓	

Cat. number	Luminous flux		Beam angle		Accessories	Bracket	M8 omega neodymium magn.	Connectors
	2400 lm	1600 lm	800 lm	28° x 28°	50° x 30°			
CRK2C.54930	✓			✓		✓	✓	Deutsch DT
CRK2C.54950		✓		✓		✓	✓	AMP SuperSeal 1.5
CRK2C.54960		✓		✓		✓	✓	
CRK2C.54970		✓		✓		✓	✓	
CRK2C.54980		✓		✓		✓	✓	
CRK2C.54990		✓		✓		✓	✓	
CRK2A.54100				✓		✓	✓	
CRK2A.54140				✓		✓	✓	
CRK2A.54130				✓		✓	✓	
CRK2A.54150				✓		✓	✓	
CRK2A.54160				✓		✓	✓	
CRK2A.54170				✓		✓	✓	
CRK2A.54180				✓		✓	✓	
CRK2A.54190				✓		✓	✓	
CRK2D.55700				✓		✓	✓	
CRK2D.55750				✓		✓	✓	
CRK2D.55770				✓		✓	✓	