



TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm
- maximum power: 30W, 29W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 50°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).



The bracket parts are made of Inox steel.

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

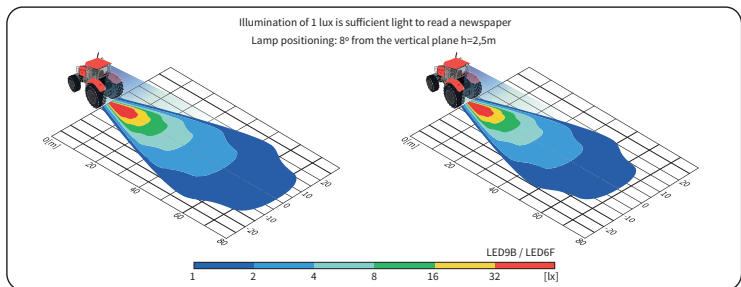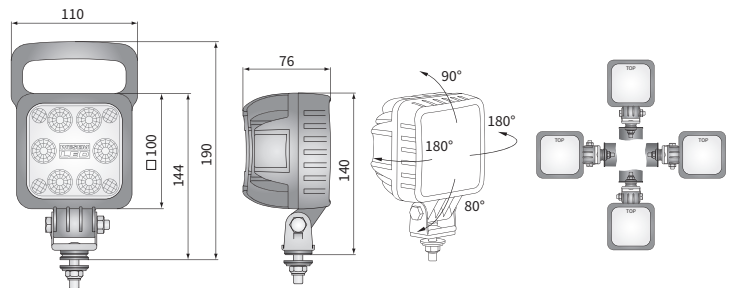

Cat. number	Luminous flux				IP rating	Accessories	Connectors						
	3000 lm	2500 lm	2000 lm	1500 lm			AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin			
LED9B.53800	✓				IP66	LED module 12V-24V							
LED9B.53880	✓				IP67	LED module 12V-48V							
LED9B.53806	✓				IP69K	handle				AMP Faston 250			2
LED9B.53807	✓				IP66	cable 0.5 m				Deutsch DT			2
LED9B.53810	✓				IP66	switch				AMP SuperSeal 1,5			2
LED9B.53881	✓				IP66								
LED9B.53816	✓				IP66								2
LED9B.53817	✓				IP66								2
LED6F.49900		✓			IP66								
LED6F.49980		✓			IP66								
LED6F.49906		✓			IP66					AMP Faston 250			2
LED6F.49907		✓			IP66								2
LED6F.49910		✓			IP66								
LED6F.49981		✓			IP66								
LED6F.49916		✓			IP66					AMP Faston 250			2
LED6F.49917		✓			IP66								2



TECHNICAL DATA / FEATURES


- dimensions: 100x100x76
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 25W, 19W
- nominal voltage: 12V-24V DC, 12V-48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 50°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Equivalents for Hella:
 LED2F.47600, LED2F.47650 - 1GA 996 189-051
 LED2F.47607, LED2F.47657 - 1GA 996 189-061

DIMENSIONS

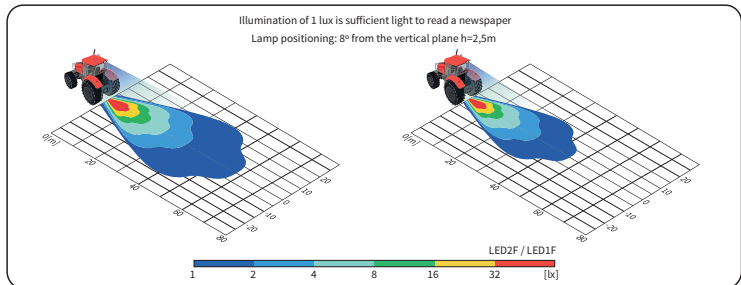

Cat. number	Luminous flux				IP rating	Accessories	Connectors						
	3000 lm	2500 lm	2000 lm	1500 lm			AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin			
LED2F.47600			✓		IP66	✓							
LED2F.47680			✓		IP67	✓							
LED2F.47606			✓		IP69K	✓			✓			2	
LED2F.47607			✓			✓			✓			2	
LED2F.47611			✓			✓				✓		2	
LED2F.47610			✓			✓		✓					
LED2F.47681			✓			✓		✓					
LED2F.47616			✓			✓		✓		✓		2	
LED2F.47617			✓			✓		✓		✓		2	
LED2F.47650			✓			✓		✓					
LED2F.47656			✓			✓		✓		✓		2	
LED2F.47657			✓			✓		✓		✓		2	
LED1F.47400				✓		✓		✓					
LED1F.47480				✓		✓		✓					
LED1F.47406				✓		✓		✓				2	
LED1F.47407				✓		✓		✓				2	
LED1F.47408				✓		✓		✓				2	
LED1F.47410				✓		✓		✓					
LED1F.47481				✓		✓		✓					
LED1F.47416				✓		✓		✓		✓		2	
LED1F.47417				✓		✓		✓		✓		2	
LED1F.47440				✓		✓		✓					
LED1F.47484				✓		✓		✓					
LED1F.47446				✓		✓		✓		✓		2	
LED1F.47447				✓		✓		✓		✓		2	
LED1F.47450				✓		✓		✓					
LED1F.47456				✓		✓		✓		✓		2	
LED1F.47457				✓		✓		✓		✓		2	