

TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 3000 lm, 2500 lm
- luminous flux of the lamp: 2400 lm, 2000 lm
- maximum power: 30W, 29W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 6°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION



The bracket parts are made of Inox steel.
It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

The bracket parts are made of Inox steel.
It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:
deutsch plug DT06-2S 2-pin - cat. No. A.07135
AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

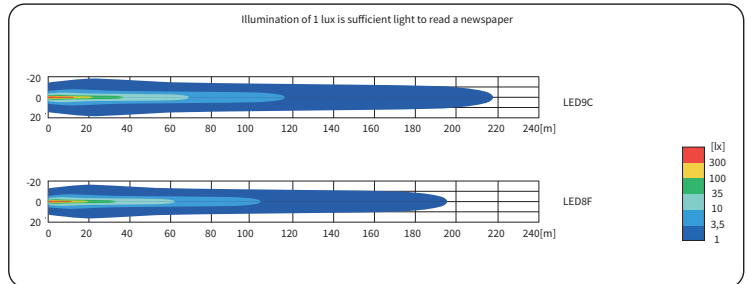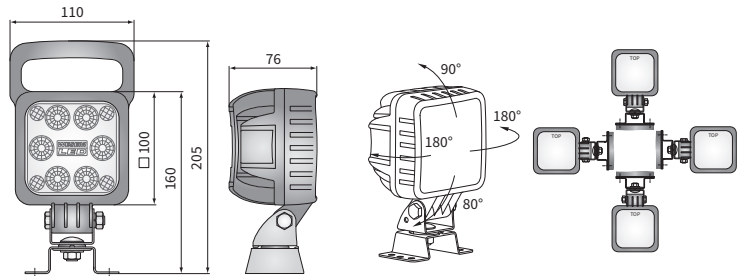

Cat. number	Luminous flux				IP rating			Accessories				Connectors					
	3000 lm	2500 lm	2000 lm	1500 lm	IP66	IP67	IP69K	LED module 12V-24V	LED module 12V-48V	omega bracket	handle	cable 0,5 m	switch	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
LED9C.53920	✓							✓	✓	✓							
LED9C.53982	✓							✓	✓	✓		✓					
LED9C.53926	✓				✓			✓	✓	✓				✓		2	
LED9C.53927	✓							✓	✓	✓				✓		2	
LED9C.53928	✓							✓	✓	✓					✓	2	
LED9C.53930	✓							✓	✓	✓	✓	✓					
LED9C.53983	✓							✓	✓	✓	✓	✓					
LED9C.53936	✓				✓			✓	✓	✓	✓			✓		2	
LED9C.53937	✓							✓	✓	✓				✓		2	
LED8F.51020		✓						✓	✓	✓		✓					
LED8F.51082		✓						✓	✓	✓		✓	✓				
LED8F.51026		✓			✓			✓	✓	✓				✓		2	
LED8F.51027		✓						✓	✓	✓				✓		2	
LED8F.51028		✓						✓	✓	✓					✓	2	
LED8F.51030		✓						✓	✓	✓	✓	✓					
LED8F.51083		✓						✓	✓	✓	✓	✓					
LED8F.51036		✓			✓			✓	✓	✓				✓		2	
LED8F.51037		✓						✓	✓	✓				✓		2	




TECHNICAL DATA / FEATURES

- dimensions: 100x100x76
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 25W, 19W
- nominal voltage: 12V-24V DC, 12V-48V DC
- permissible power supply voltage: 10.5V-30V DC, 10.5V-60V DC
- source of light: 6 x LED
- colour temperature: 5000-7000K
- light distribution angle: 6°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

DIMENSIONS

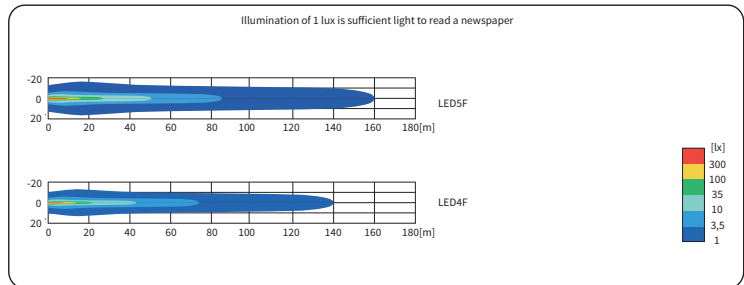

Cat. number	Luminous flux				IP rating	Accessories	Connectors			
	3000 lm	2500 lm	2000 lm	1500 lm			AMP Faston 250	Deutsch DT	AMP SuperSeal 1.5	Cap / Pin
LED5F.47920			✓		IP66	LED module 12V-24V	✓			
LED5F.47982			✓		IP67	LED module 12V-48V	✓			
LED5F.47926			✓		IP69K	omega bracket	✓			
LED5F.47927			✓			handle	✓			
LED5F.47928			✓			cable 0,5 m	✓			
LED5F.47930			✓			switch	✓			
LED5F.47983			✓				✓			
LED5F.47936			✓				✓			
LED5F.47937			✓				✓			
LED4F.47820			✓				✓			
LED4F.47882			✓				✓			
LED4F.47826			✓				✓			
LED4F.47827			✓				✓			
LED4F.47828			✓				✓			
LED4F.47830			✓				✓			
LED4F.47883			✓				✓			
LED4F.47836			✓				✓			
LED4F.47837			✓				✓			
LED4F.47860			✓				✓			
LED4F.47886			✓				✓			
LED4F.47866			✓				✓			
LED4F.47867			✓				✓			
LED4F.47868			✓				✓			
LED4F.47870			✓				✓			
LED4F.47887			✓				✓			
LED4F.47876			✓				✓			
LED4F.47877			✓				✓			