


**TECHNICAL DATA / FEATURES**

dimensions:	100x100x76
luminous flux of the LED module:	3000 lm, 2500 lm, 2000 lm, 1500 lm
luminous flux of the lamp:	2400 lm, 2000 lm, 1600 lm, 1200 lm
maximum power:	30W, 29W, 25W, 19W
nominal voltage:	12V-24V DC, 12V-48V DC
permissible power supply voltage:	10.5V-30V DC, 10.5V-60V DC
source of light:	6 x LED
colour temperature:	5000-7000K
light distribution angle:	66° x 22°
IP rating:	IP67, IP69K
work temperature:	-40°C - +80°C
housing's material:	aluminium/plastic
lens' material:	plastic
built-in connectors:	AMP Faston 250
other:	protection:
	• against overheating
	• against reverse polarisation
	bracket made of Inox steel


**ADDITIONAL INFORMATION**

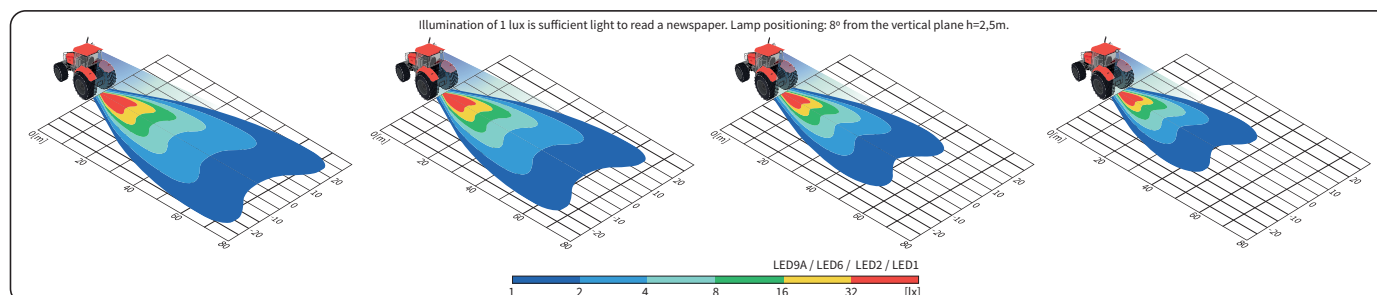
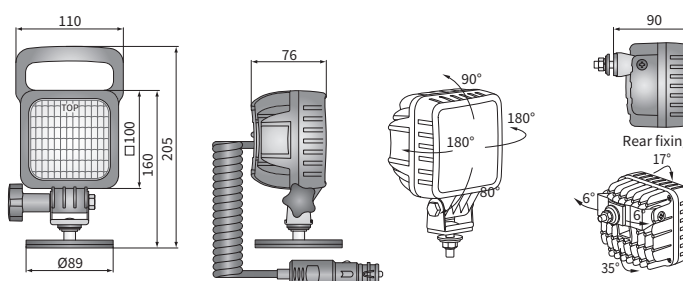
Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Replacement parts:

neodymium magnet  $\phi 89/500N$  (1 pc.) - cat. No. CAR4.51320

**DIMENSIONS**


Cat. number	Luminous flux	3000 lm	2500 lm	2000 lm	1500 lm	IP rating	IP67	IP69K	Accessories	LED module 12V-24V	LED module 12V-48V	handle	cable 0,22 m	cable 0,5 m	cable 8 m	switch	cigarette lighter plug	Mounting method	any	installed vertically up	rear	Bracket	neodymium magn.	CAR1	M8	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin
<b>LED9A.53795</b>	✓						✓	✓		✓						✓	✓	✓	✓	✓		✓								
<b>LED9A.53796</b>	✓						✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
<b>LED6.49895</b>		✓					✓	✓		✓						✓	✓	✓	✓	✓		✓								
<b>LED6.49896</b>			✓				✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
<b>LED6.49897</b>			✓				✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
LED6.49825		✓					✓	✓		✓				✓							✓									
<b>LED2.47595</b>				✓			✓	✓		✓						✓	✓	✓	✓	✓		✓								
<b>LED2.47596</b>				✓			✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
LED2.47597				✓			✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
LED2.47525				✓			✓	✓		✓				✓							✓									
<b>LED1.46831</b>					✓		✓	✓		✓						✓	✓	✓	✓	✓		✓								
<b>LED1.46832</b>					✓		✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
LED1.46833					✓		✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
LED1.46818					✓		✓	✓		✓		✓									✓									
LED1.46825					✓		✓	✓		✓				✓												✓				2
<b>LED1.46834</b>					✓		✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								
<b>LED1.46835</b>					✓		✓	✓		✓		✓				✓	✓	✓	✓	✓		✓								