



TECHNICAL DATA / FEATURES

- dimensions: 105x105x50
- function markings: AR
- luminous flux of the LED module: 2400 lm, 1600 lm, 800 lm
- luminous flux of the lamp: 2000 lm, 1300 lm, 650 lm
- maximum power: 27W, 22W, 11W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 18 x LED, 12 x LED, 6 x LED
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Particularly recommended for trucks and vans.

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels. They can be installed in any position (standing, hanging, on side).



It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137

deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

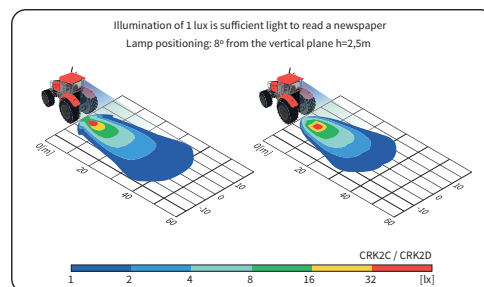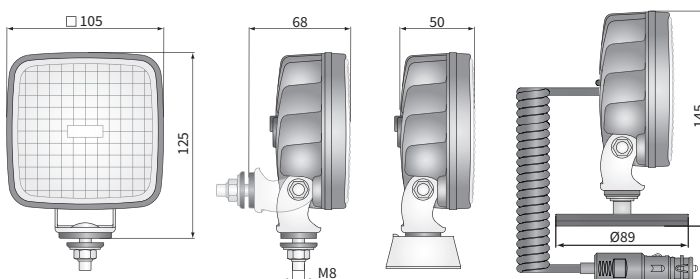

Cat. number	Homologation code	Luminous flux			Rated power			IP rating			Type	housing	Accessories		Connectors	Bracket		Packaging / pc	carton box
		2400 lm	1600 lm	800 lm	27W	22W	11W	IP67	IP69K	18 x LED			12 x LED	6 x LED		LED module 12V-24V	cable 0.5 m		
CRK2F.57300	112	✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2F.57340	112	✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2F.57350	112	✓			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54900	104		✓			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54940	104		✓			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54950	104		✓			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54960	104		✓			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54970	104		✓			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2C.54980	104		✓			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2D.55700	107			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2D.55750	107			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1
CRK2D.55770	104			✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	1