



**TECHNICAL DATA / FEATURES**

- dimensions: 100x100x91
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle: 63° x 45°
- IP rating: IP66, IP69K
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: AMP Faston 250
- other: handle (option)  
switch (option)  
shock absorber



**ADDITIONAL INFORMATION**

Popular among the users lamps with multiple application possibilities.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.




A wide range of connectors and brackets. They can be installed in any position.

Useful parts while installing:  
AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:  
switch - cat. No. WYL1.46300  
hermetic grommet - cat. No. A.28500

Equivalents for Hella:  
A - 1GA 007 506-451 C - 1GA 996 150-021  
B - 1GA 007 506-011 D - 1GA 007 506-021

**DIMENSIONS**

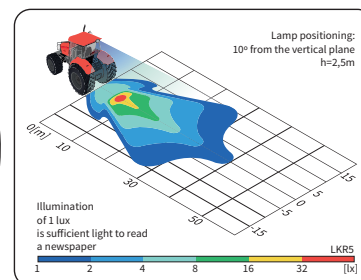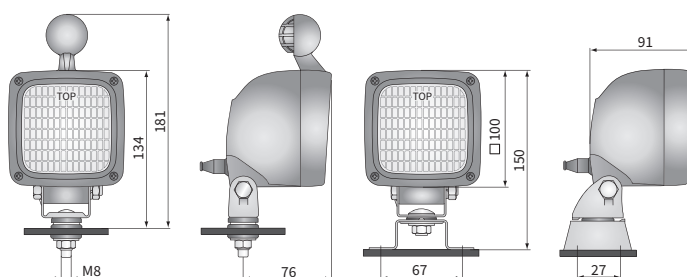

Cat. number	IP rating		Accessories							Bracket			Equivalents	
	IP66	IP69K	bulb H3 12V	bulb H3 24V	handle	switch	shock absorber	grommet	hermetic grommet	AMP Faston connector	M8	omega	Hella	Hella
<b>LKR5.24765</b>	✓	✓					✓		✓		✓			A
<b>LKR5.24866</b>	✓	✓	✓				✓		✓		✓			A
LKR5.24867	✓	✓		✓			✓		✓		✓			A
<b>LKR5.39900</b>	✓					✓	✓		✓		✓			
<b>LKR5.24775</b>	✓	✓							✓			✓		B
<b>LKR5.24876</b>	✓	✓	✓				✓		✓			✓		C
<b>LKR5.39901</b>	✓					✓	✓		✓			✓		
<b>LKR5.39902</b>	✓		✓			✓	✓		✓			✓		
LKR5.24768	✓	✓			✓		✓		✓			✓		D
<b>LKR5.39904</b>	✓				✓	✓	✓		✓			✓		
<b>LKR5.24779</b>	✓						✓	✓			✓			
LKR5.24777	✓						✓	✓				✓		
<b>LKR5.39910</b>	✓					✓	✓	✓			✓			
<b>LKR5.24778</b>	✓						✓	✓			✓			