



TECHNICAL DATA / FEATURES

- dimensions: 241x135x90
- light functions: fog light, driving, position
- function markings: B, HR, A
- reference mark: -, 20
- source of light: H3, T4W
- maximum power: 70W, 4W
- nominal voltage: 12V-24V DC
- optics: standard
- IP rating: IP54
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- lens' colour: clear, blue
- mounting: M10
- built-in connectors: -
- other: the mount steel-reinforced



ADDITIONAL INFORMATION





To be mounted at the front of the car or truck. They can be installed in an upright or upside down position.

It is possible to install needed connectors on wire (on request).

Replacement parts:

position light bulb holder - cat. No. A.05921

DIMENSIONS

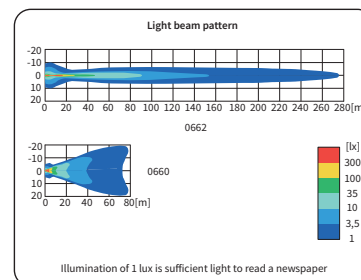

Cat. number	Hella Catal. No.	Homologation code	Light functions			Lens colour		frame	black	chrome-plated	Accessories	bulb H3 12V	bulb H3 24V	bulb T4W	cable 0,15 m	Side			Connectors			Packaging / pc	
			fog light	driving	position	clear	blue									right	left	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	carton	box	
0660.43200	1NE 006 300-071	660	✓			✓								✓		✓	✓					1	
0660.43210	1NE 006 300-011	660	✓			✓			✓					✓		✓	✓					1	
0660.43211	1NE 006 300-011	660	✓			✓				✓				✓		✓	✓					1	
0662.43300	1FE 006 300-041	662		✓	✓	✓			✓					✓		✓	✓					1	
0662.43302		662		✓	✓	✓			✓					✓		✓	✓					1	
0662.43310	1FE 006 300-001	662		✓	✓	✓			✓					✓		✓	✓					1	
0662.43311	1FE 006 300-001	662		✓	✓	✓			✓		✓			✓		✓	✓					1	
0662.43320		662		✓	✓				✓					✓		✓	✓					1	
0662.43321		662		✓	✓				✓		✓			✓		✓	✓					1	
0662.43330	1FE 006 300-261	662		✓	✓				✓					✓		✓	✓					1	
0662.43332	1FE 006 300-261	662		✓	✓				✓			✓		✓		✓	✓					1	