



**TECHNICAL DATA / FEATURES**

- dimensions: φ161x112, φ161x115
- light functions: passing, driving, position
- function markings: C/R, A, HC/R
- traffic: right-hand
- reference mark: 7.5, 12.5
- source of light: R2, T4W, H4
- maximum power: 55/50W, 4W, 75/70W
- nominal voltage: 12V-24V DC
- optics: standard
- IP rating: IP55
- housing's material: plastic, metal
- lens' material: glass
- built-in connectors: -
- other (optional): metal housing



**ADDITIONAL INFORMATION**

Particularly recommended for tractors and slow-moving vehicles.

Possible installation as: left-side, right-side or in vertical position using 18mm, steel, zinc plated bushing (supplied). The wiring runs through the length of the mounting bolt.

Useful parts while installing:

- main bulb gasket - cat. No. A.05820
- position light bulb holder - cat. No. A.05921
- main bulb mounting block - cat. No. A.07128





Dedicated application:

A - tractors:

- Ursus: C-300, C-4000
- Zetor: 2011, 3011, 3511, 4011, 6711
- Pronar Zubron 2032A

A - electric vehicle Melex 252

**DIMENSIONS**

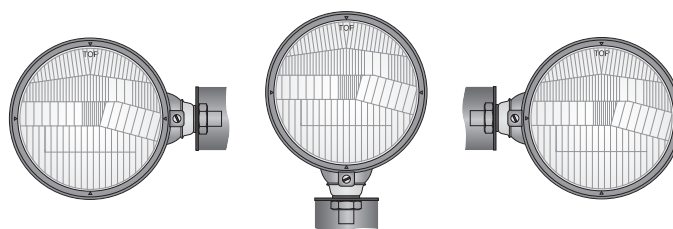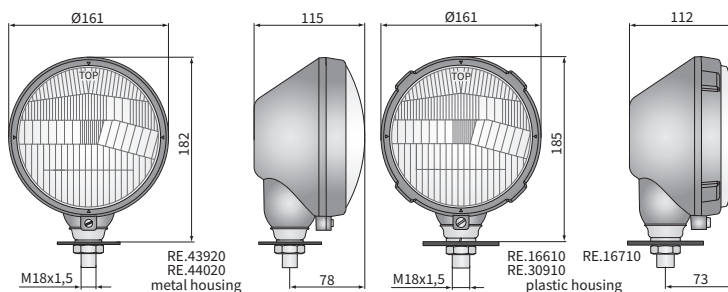

Cat. number	Homologation code	Light functions			Type	R2	H4	Accessories		Housing material	plastic	metal	Mounting method			Application	dedicated
		passing	driving	position				bulb R2 12V	bulb T4W				side - right	side - left	installed vertically up		
RE.13910	032	✓	✓	✓		✓				✓			✓				A
RE.16510	212	✓	✓	✓			✓			✓				✓			A
RE.03210	032	✓	✓	✓		✓				✓					✓		A
RE.21210	212	✓	✓	✓			✓			✓						✓	A
RE.16710	032	✓	✓	✓		✓				✓					✓		A
RE.30910	032	✓	✓	✓		✓		✓	✓	✓					✓		A
RE.16610	212	✓	✓	✓			✓			✓					✓		A
RE.44010	032	✓	✓	✓		✓				✓	✓		✓				A
RE.43910	212	✓	✓	✓			✓			✓	✓		✓				A
RE.44000	032	✓	✓	✓		✓				✓	✓		✓				A
RE.43900	212	✓	✓	✓			✓			✓	✓		✓				A
RE.44020	032	✓	✓	✓		✓				✓	✓		✓				A
RE.43920	212	✓	✓	✓		✓				✓	✓		✓				A