



TECHNICAL DATA / FEATURES

- dimensions: 140x93x77, 148x93x77, 165x105x77
- light functions: position, direction indicator, stop light (main)
- function markings: A, 1, R-S1, 2a
- traffic: right-hand / left-hand
- source of light: P21W and R5W, P21W and P21/5W
- maximum power: 21W, 5W, 21/5W
- nominal voltage: 12V-24V DC
- optics: FF
- IP rating: IP55
- mounting: 2xM5
- housing's material: plastic
- housing's colour: black
- lens' material: plastic
- built-in connectors: AMP SuperSeal 1.5, Deutsch DT



ADDITIONAL INFORMATION

Possible installation as: left-side or right-side, in horizontal, vertical or side position.



Front lamp available as version 2F, position light and direction indicator. Rear lamps available as version 3F, including position light, direction indicator and stop light.

Useful parts while installing:
 AMP SuperSeal 1,5 plug 4-pin - cat. No. A.07133
 Deutsch plug DT06-4S 4-pin - cat. No. A.07136

Equivalents for Cobo:
 LT3.48400 - 02.1335.0000
 LT3.48481 - 02.0665.0000

- Dedicated application:
- A - tractors Zetor: Proxima, Proxima Power, Proxima Plus, Silver, Silver Power Plus, Forterra, Forterra HSX, Maxterra
 - B - tractors John Deere: GL5075, GL5085
 - C - tractors John Deere: 5G, 5GF, 5GV
 - D - JCB telescopic loader: Agri (Loadall) 560-80
 - E - tractors New Holland: T3000, T4 PowerStart, T5000, TD5000
 - F - tractors John Deere series: 6030, 6M, 6R, 7030, 7R, 8R

DIMENSIONS

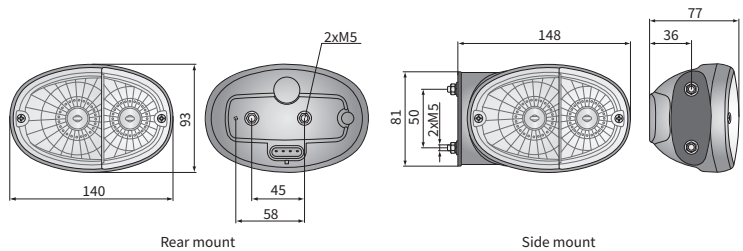

For recess mounting

Cat. number	Hella Catal. No.	John Deere No.	Homologation code	Lamp type		Light functions	position	direction indicator	stop light (main)	Accessories	Mounting method				Side	Connectors	Application	dedicated	Packaging / pc	carton box
				front	rear						rear	side	in recess							
LT3.48450	2BE 343 130-001,007		082	✓		✓	✓	✓		bulb P21W 12V	✓	✓	✓	✓	AMP Faston 250		C/D	1	1	
LT3.48460	2BE 343 130-657,667		082	✓		✓	✓	✓		bulb P21/5W 12V	✓	✓	✓	✓	Deutsch DT		C	1	1	
LT3.48470			082	✓		✓	✓	✓		bulb R5W 12V		✓	✓	✓	AMP SuperSeal 1.5			1	1	
LT3.48463		AL171029	082	✓		✓	✓	✓		bulb P21W 24V		✓	✓	✓	Delphi 12129615		F	1	1	
LT3.48464		AL171053	082	✓		✓	✓	✓		bulb P21/5W 24V		✓	✓	✓	Cap / Pin		F	1	1	
LT3.48480			082	✓		✓	✓	✓		bulb R5W 24V		✓	✓	✓			A/B/E	1	1	
LT3.48481	2BE 343 130-417,427		082	✓		✓	✓	✓		cable 0,7 m		✓	✓	✓				1	1	
LT3.48490	2BE 343 130-777,787		082	✓		✓	✓	✓				✓	✓	✓				1	1	
LT3.48491	2BE 343 130-657,667		082	✓		✓	✓	✓				✓	✓	✓				1	1	
LT3.48492			082	✓		✓	✓	✓				✓	✓	✓				1	1	
LT3.48400	2SD 343 130-011,017		077		✓	✓	✓	✓				✓	✓	✓				1	1	
LT3.48410	2SD 343 130-157,167		077		✓	✓	✓	✓				✓	✓	✓			A/B	1	1	
LT3.48420	2SD 343 130-137,147		077		✓	✓	✓	✓				✓	✓	✓				1	1	
LT3.48430	2SD 343 130-797,807		077		✓	✓	✓	✓				✓	✓	✓				1	1	
LT3.48431			077		✓	✓	✓	✓				✓	✓	✓				1	1	
LT3.48440			077		✓	✓	✓	✓				✓	✓	✓				1	1	
LT3.48441	2SD 343 130-737,747		077		✓	✓	✓	✓				✓	✓	✓				1	1	
LT3.48442	2SD 343 130-397,227		077		✓	✓	✓	✓				✓	✓	✓				1	1	